


# HSF

**NOTES:**

Current Rating: 2.0AMP  
 Contact Resistance: 20mΩ Max  
 Withstand Voltage: 500V AC/DC  
 Insulation Resistance: 1000MΩ Min  
 Operation Temperature: -40°C to +105°C

Contact Material: Phosphor Bronze  
 Contact plating: Au Or Sn over Ni  
 Insulator Material: PA9T+30%G.F UL94V-0

Recommended P.C.B Layout (Top Side)  
 (PCB BOARD TOLERANCE±0.05)

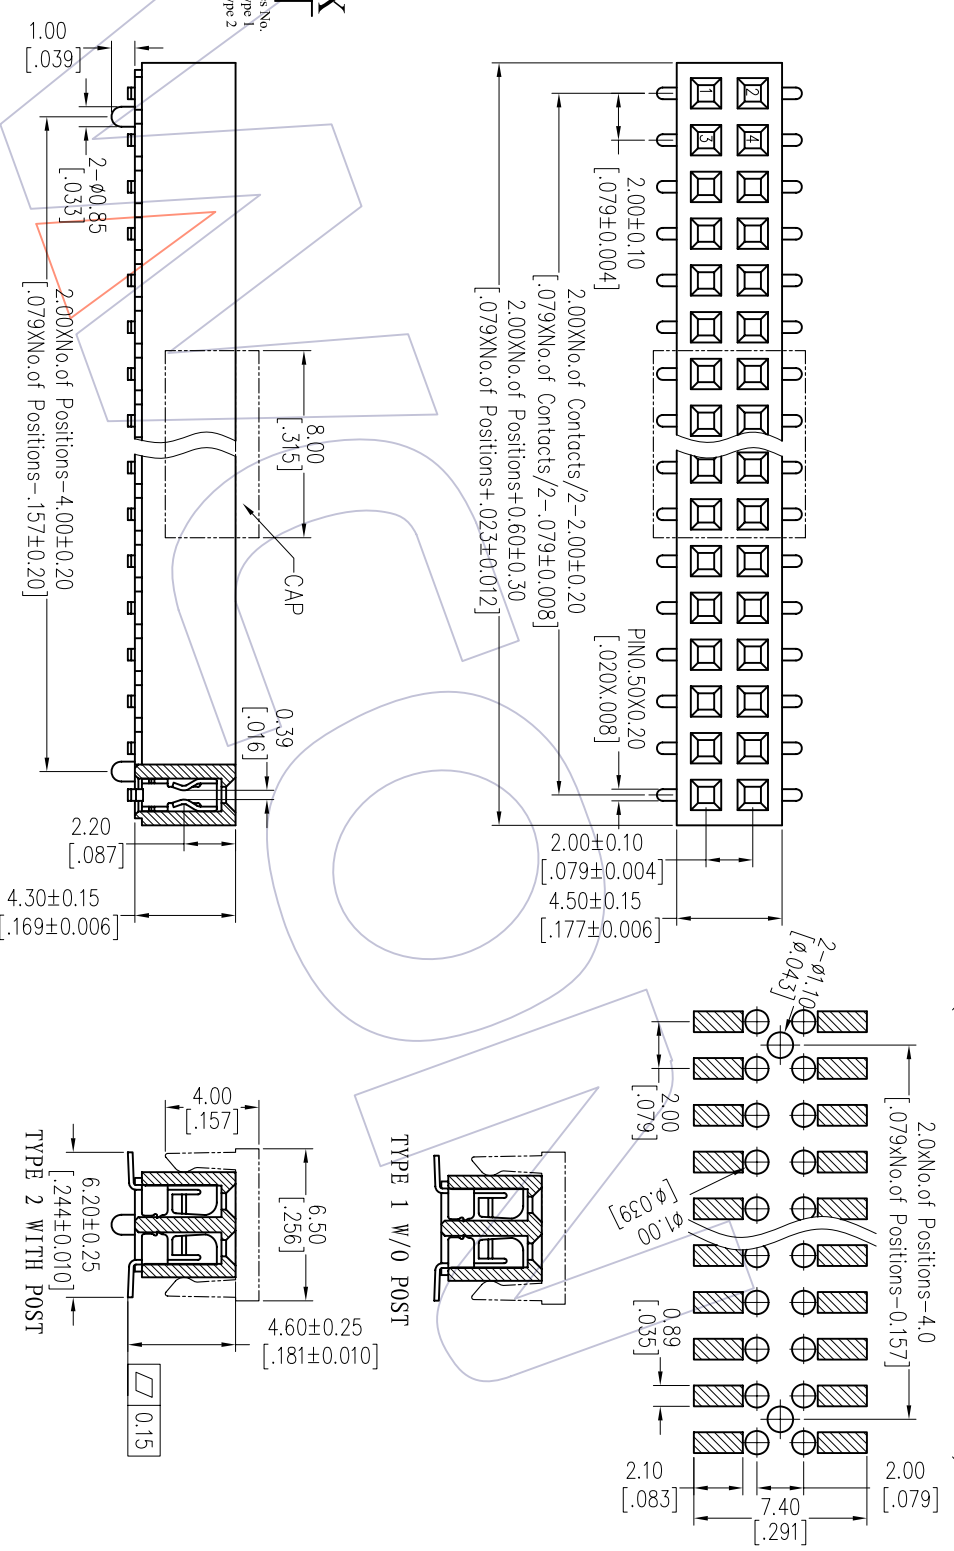

## Ordering Information

2243-2 XX M XX CUN T X

No. of Pins per Row: 02-40Pin

Contact Plating:  
 G0=Gold Flash  
 G3=10µ"Gold  
 G4=15µ"Gold  
 G5=30µ"Gold  
 S0=Gold Flash/Tin  
 S3=10µ"Gold/Tin  
 S4=15µ"Gold/Tin  
 S5=30µ"Gold/Tin  
 SN=Tin  
 SM=Mate Tin

Packing:  
 T=Tube  
 P=Tube+CAP  
 R=Tube+Reel+CAP

Series No.  
 1=Type 1  
 2=Type 2

Item	Pitch	Mating
Standard	2.00	1215/1220
Alternate		

REV	DATE	MODIFICATION DESCRIPTION
A0	2012/07/14	NEW

OPERATION	DRAW	DATE	SCALE	FIT	PART NO.
XX	JYHuog	2012/07/14	±0.40	mm	SSEE TABLE
XX	CHECK	DATE	±0.25	A4	TITLE:
XX	APPROVE	DATE	±0.15	1/1	FH2.00 DUAL ROW 180° SMT
Angle	± 3°	PROJ.			IF=4.3 W=4.5
DIM	TOL				Customer NO.

WCON-Dongguan  
 Tel: +86 769 85358920  
 Fax: +86 769 85358915  
 E-mail: sales@wcon.com

Http: www.wcon.com

WCON-Kunshan  
 Tel: +86 512 57468408  
 Fax: +86 512 57468468  
 E-mail: sales@wcon.com

TITLE	PART NO.
TYPE 1	2243-2XXMXXCUNT1
TYPE 2	2243-2XXMXXCUNT2