



NOTES:
 Rated Current:3.0AMP.
 Contact Resistance:20mΩ Max.
 Withstand Voltage:1000V AC/DC
 Insulation Resistance:1000MΩ Min.
 Operation Temperature:-40℃ to +105℃




Contact Material:Brass
 Contact Plating:Au or Sn Over Ni
 Insulator Material:PA9T+30%G.F UL94V-0

Ordering Information

1174-12 XX XX R XXX X X

No. of Pins Contact Plating Pin Length(Short) Packing
 Per Row:2-40 G0=Gold Flash L=A+B+5.6 0=BE Bag
 G3=10u"Gold Standard:146=14.6 T=Tube
 G4=15u"Gold
 G5=30u"Gold
 S0=Gold Flash/Tin
 S3=10u"Gold/Tin
 S4=15u"Gold/Tin
 S5=30u"Gold/Tin

Item	Pin Length	A	B
Standard	14.60	3.00	6.00
Alternate			

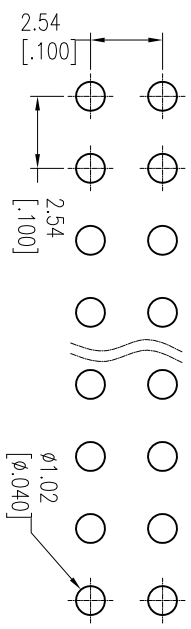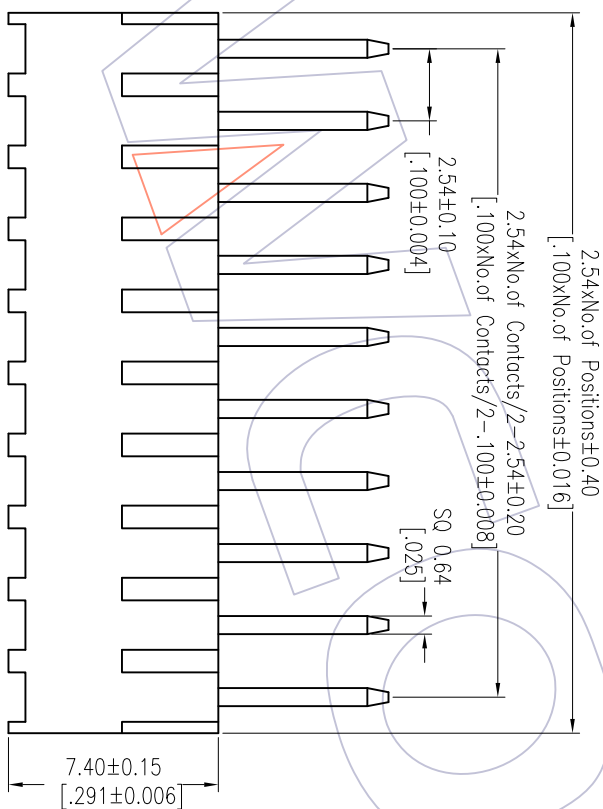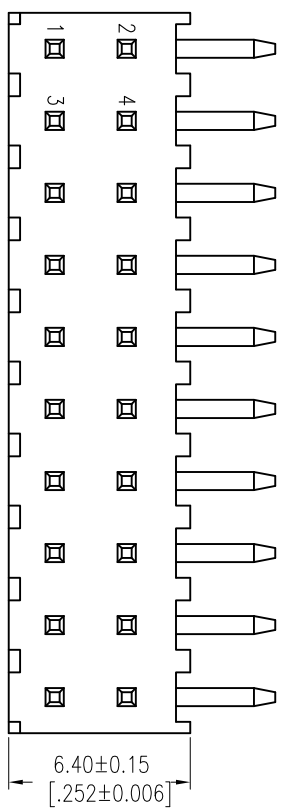

Recommended P.C.B Layout (Top Side)
 (PCB BOARD TOLERANCE±0.05)

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION	DRAW	DATE	SCALE	PART NO.	 Http: www.wcon.com WCON-Dongguan Tel: +86 769 85358920 Fax: +86 769 85358915 E-mail: sales@wcon.com WCON-Kunshan Tel: +86 512 57468408 Fax: +86 512 57468468 E-mail: sales@wcon.com
A2	2013/03/01	Modify The Material		XX ±0.40	Ts ingsn	2013/03/01	mm	1174-12XXXXRXXXXXX	
A1	2012/12/13	Add PBT Material		XXX ±0.25	CHECK	DATE	A4	PH2.54 DUAL ROW 90° H=7.4	
A0	2012/05/08	NEW	-----	XXX ±0.15	APPROVE	DATE	1/1	Customer NO.	
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	Angle ± 3°	APPROVE	DATE	PROJ.		
				DIM	TOL				