

HSF

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

NOTES:

Current Rating:1.0AMP
Contact Resistance:20mΩ Max
Withstand Voltage:500V AC/DC
Insulation Resistance:1000MΩ Min
Operation Temperature:-40°C to +105°C


Contact Material:Phosphor Bronze
Contact plating:Au over Ni
Insulator Material:PA9T+30%GF UL94V-0

Ordering Information

2334-2 XX M XX CUN X 3

No. of Pins per Row: 02-50Pin
Contact Plating:
G0=Gold Flash
G1=0u"Gold
G4=15u"Gold
G5=30u"Gold
Packing:
T=Tube
P=Truber-CAP
R=Tape&Reel+CAP

Item	Pitch	Mating
Standard	1.27	1310/1315/1320/3131
Alternate		

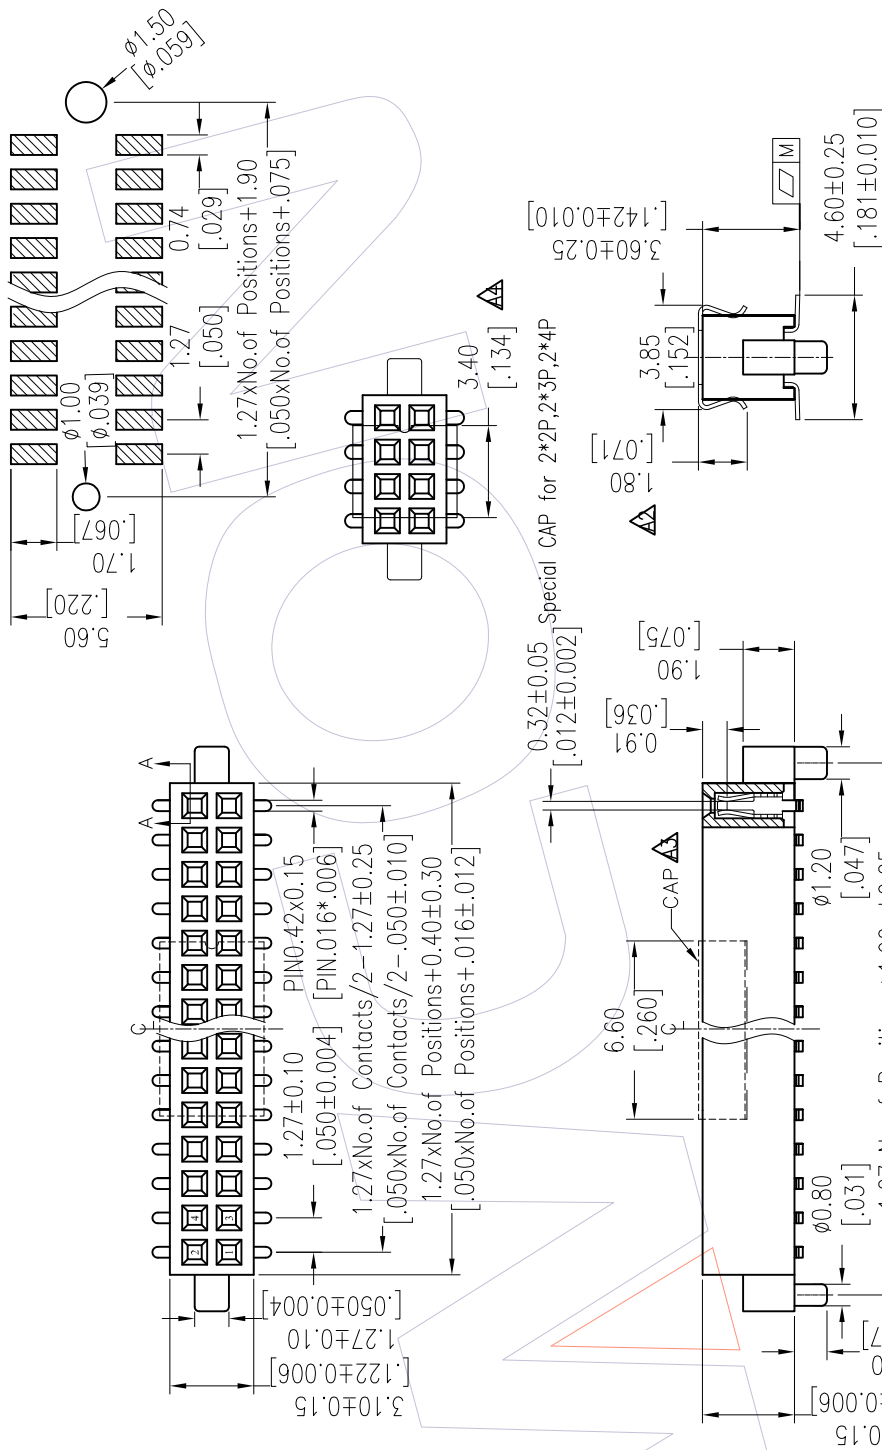

SECTION A-A

REV	DATE	DESCRIPTION	CHANGE	DIM	TOL	APPROVE	SHEET	SIZE	UNIT	SCALE	FIT	PART NO.	TITLE:
A4	2016/06/17	Modify CAP	3.00	→	3.40		1/1	A4	mm			2334-2XXMXXCUNX3	FH1.27mm DUAL ROW 180° SMT WITH DIFFERENT POST AND METAL CAP H=3.40
A3	2014/12/30	Modify CAP					1/1	A4	mm				
A2	2013/08/21	Modify cap2.00			1.80		1/1	A4	mm				
A0	2012/07/06	NEW					1/1	A4	mm				
REV	DATE	MODIFICATION	CHANGE	DIM	TOL	APPROVE	SHEET	SIZE	UNIT	SCALE	FIT	PART NO.	TITLE:

WCON
Http: www.wcon.com

WCON-Dongguan
Tel: +86 769 85358920
Fax: +86 769 85358915
E-mail: sales@wcon.com

WCON-Kunshan
Tel: +86 512 57468408
Fax: +86 512 57468468
E-mail: sales@wcon.com