

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)


NOTES:
Current Rating:1AMP
Contact Resistance:30mΩ max
Withstand Voltage:250V AC/DC
Insulation Resistance:1000MΩ min
Operation Temperature:-40℃ to +105℃

Contact Material:Phosphor Bronze(C5191-H)
Contact plating:Au Or Sn Over Ni
Insulator Material:PA9T+30%GF(UL94V-0)

Ordering Information

WF1271-1 WS H XX S0 B T 0

No. of Pins
4-50 PIN
Contact Plating
Spec:Gold Flash/Tin
Packaging
T=Tube

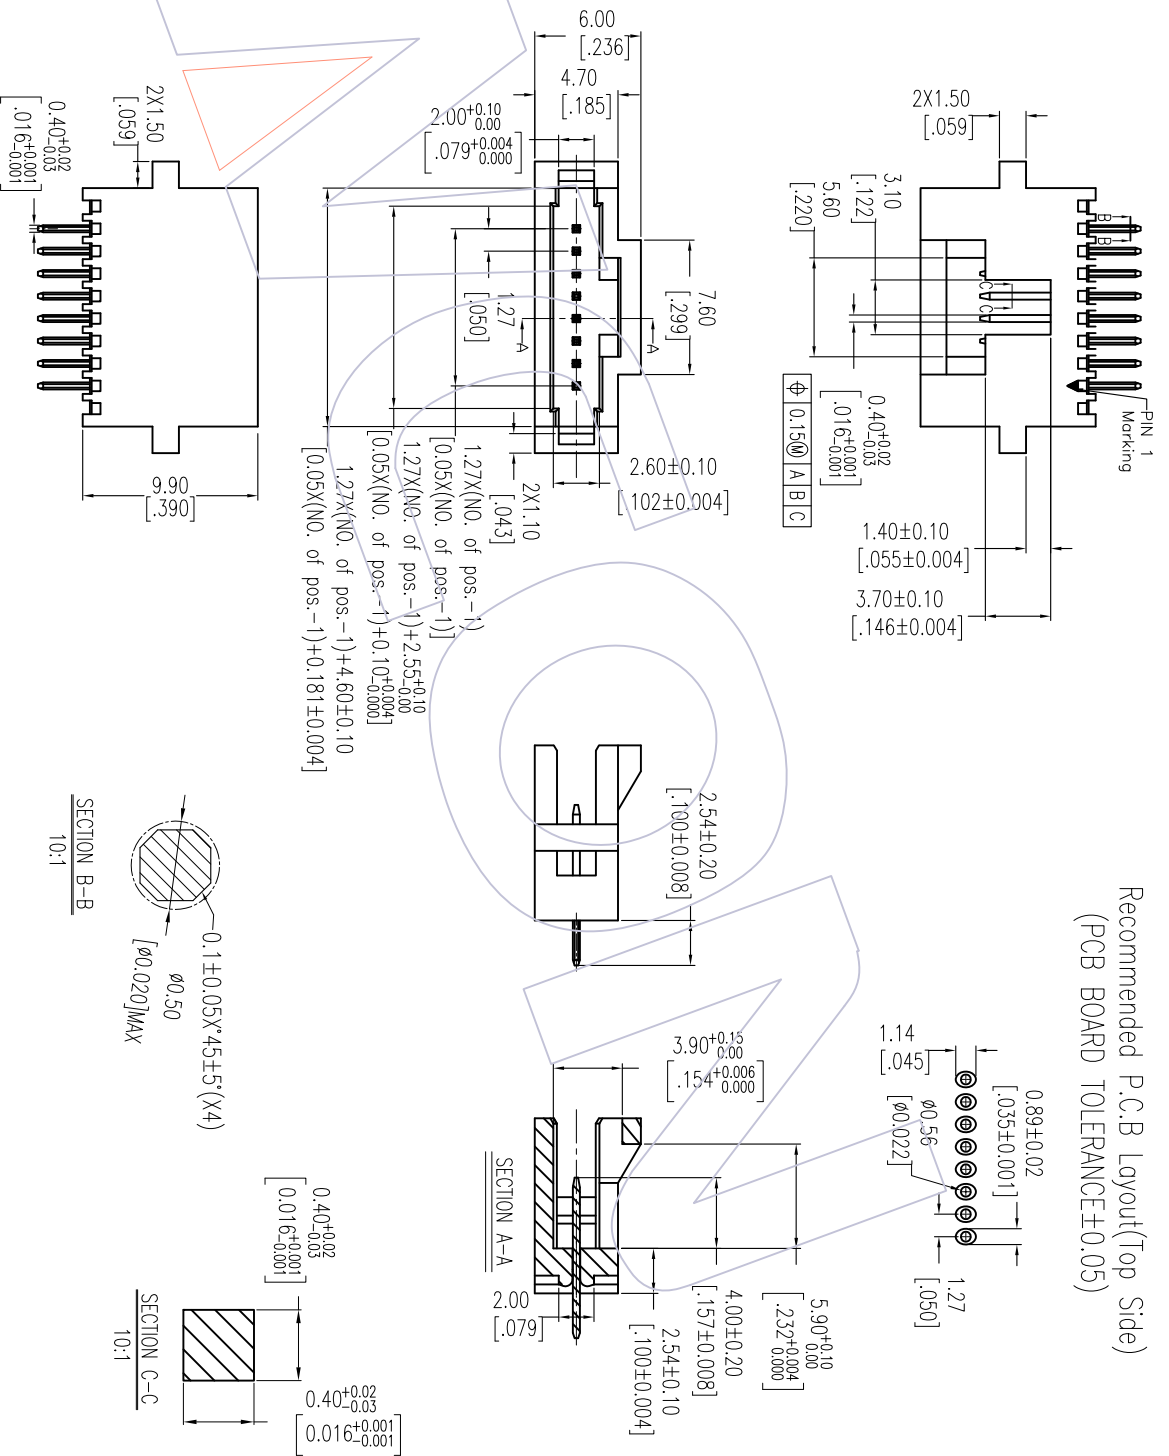

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION	DRAW	DATE	SCALE	FT	PART NO.	TITLE:	WCON-Dongguan Http: www.wcon.com	WCON-Kunshan Tel: +86 512 57468408 Fax: +86 512 57468468 E-mail: sales@wcon.com
AO	2016/07/14	NEW		XX	JYHuang	2016/07/14	mm	inch	WF1271-1WSHXXS0BTO			
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	Angle	CHECK	DATE	UNIT	SIZE	SHEET	PROJ.	Customer NO.	
				± 3'	APPROVE		A4	1/1				

